




COMBINATION CURB & GUTTER TYPE B-6.12

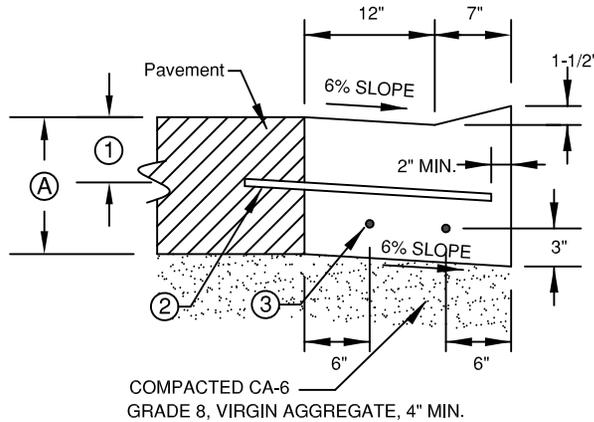


COMBINATION DEPRESSED CURB & GUTTER

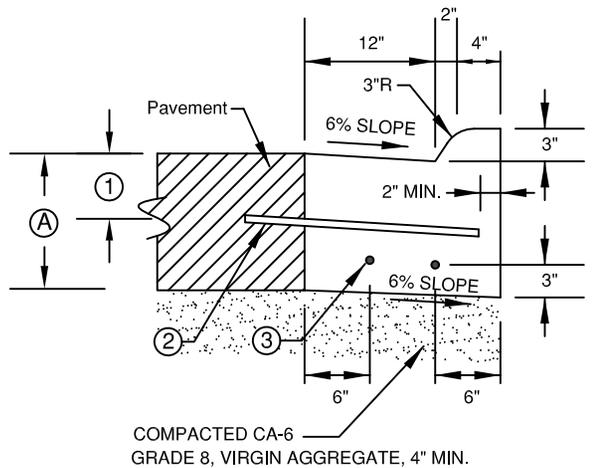

COMBINATION CURB & GUTTER TYPE M-3.12

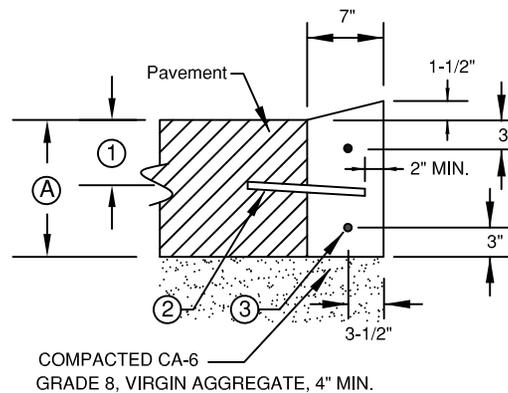

DEPRESSED CURB (TYPE B)

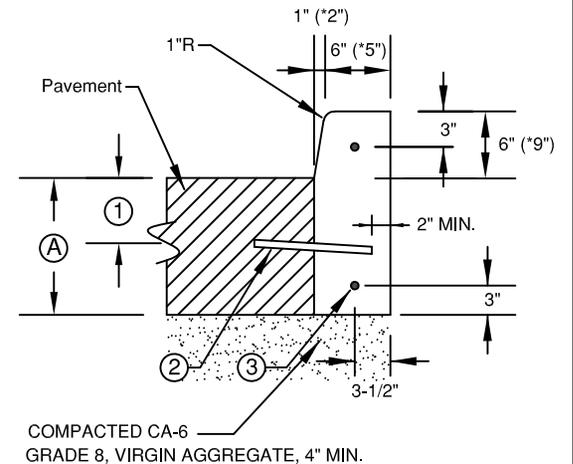

* FOR 9" CURB, THESE SHALL BE 2" & 5".

BARRIER CURB (TYPE B)

- (A) PAVEMENT DEPTH OR 9" MIN.
- (1) TO BE CENTERED OR SET AS REQUIRED IN FIELD.
- (2) 1/2" DIA. STEEL TIE BAR AT 2'-6" CENTERED WHEN PAVEMENT IS CONCRETE. OMIT WHEN ADJACENT PAVEMENT IS FLEXIBLE.
- (3) 5/8" DIA. STEEL REBAR CONTINUOUS (TYPICAL).

NOTES:

PROVIDE DEPRESSED CURBS AT DRIVEWAYS, CROSSWALKS, AND SIDEWALKS, ETC.

ALL CONCRETE SHALL HAVE 4,000 P.S.I. COMPRESSIVE STRENGTH AT 28 DAYS.

ALL MATERIALS AND CONSTRUCTION SHALL CONFORM TO I.D.O.T. STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION SECTION 606 UNLESS OTHERWISE NOTED HEREIN.



VILLAGE OF WHEELING
ENGINEERING DIVISION
2 COMMUNITY BOULEVARD
WHEELING, IL 60090
WWW.WHEELINGIL.GOV

CURB AND GUTTER STANDARD

VILLAGE OF WHEELING SPECIFICATIONS AND DETAILS	S.W.	06-16-00 AUTOCAD FILE	DETAIL NO.
FILE LOCATION	C.J.C.	11-27-07 AUTOCAD FILE	
T:\ENGINEERING\STANDARDS	K.A.G.	11-21-16 AUTOCAD FILE	R-12

REVISIONS	
S.W.	06-16-00 AUTOCAD FILE
C.J.C.	11-27-07 AUTOCAD FILE
K.A.G.	11-21-16 AUTOCAD FILE

DETAIL NO.

R-12