


STREET NAME SHALL BE UPPER AND LOWER CHARACTERS AS SHOWN.

NOTES:

1. ALL SIGNS SHALL MEET THE REQUIREMENTS OF THE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES.
2. ALL SIGNS SHALL BE CONSTRUCTED OF 0.125 GAUGE ALUMINUM BLANKS WITH STANDARD ROUNDED CORNERS.
3. ALL SIGN FACES SHALL BE DIAMOND GRADE. ALL SIGNS SHALL BE FASTENED TO THE POSTS WITH VANDAL PROOF NUTS AND BOLTS.
4. STREET NAME SIGNS SHALL BE ATTACHED TO BOTH FACES OF SIGN BLANKS ON GREEN BACKGROUND, WHITE LETTERS AND WHITE BORDER.
5. 10' IF STREET SIGNS ARE ATTACHED TO STREET LIGHT POLES WITH BRACKETS.
6. ALL STREET SIGNS SHALL BE INSTALLED AT THE LOCATION AS DIRECTED BY ENGINEER & TWO FEET FROM BACK OF CURB.

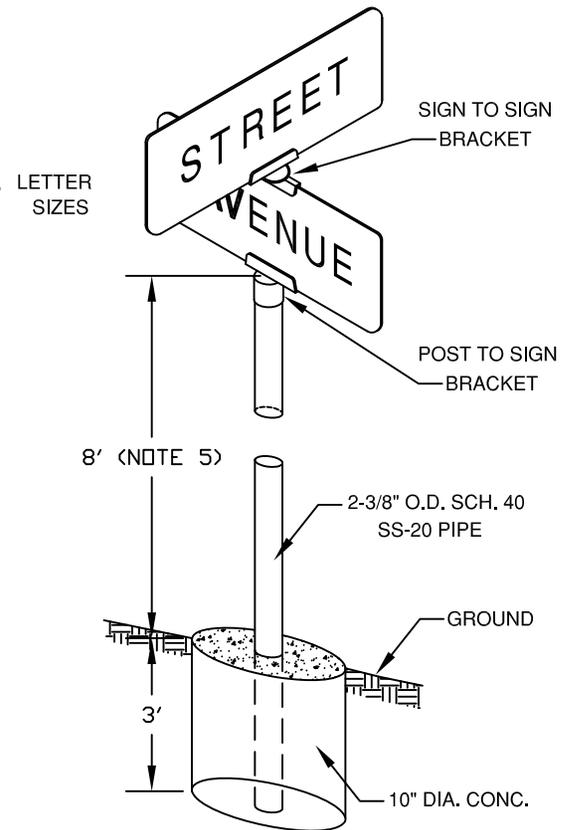

VILLAGE OF WHEELING
ENGINEERING DIVISION
2 COMMUNITY BOULEVARD
WHEELING, IL 60090
WWW.WHEELINGIL.GOV

TYPICAL ARTERIAL STREET SIGN STANDARD

VILLAGE OF WHEELING SPECIFICATIONS AND DETAILS	S.W.	05-13-03 AUTOCAD FILE	DETAIL NO.
FILE LOCATION	C.J.C.	11-27-07 AUTOCAD FILE	R-17
T:\ENGINEERING\STANDARDS			

REVISIONS	
S.W.	05-13-03 AUTOCAD FILE
C.J.C.	11-27-07 AUTOCAD FILE

DETAIL NO.
R-17