


CATCH BASIN (TYPE A)



RESTRICTOR CLEANOUT DETAIL

- NOTE:
1. STORM SEWER PIPES IN PUBLIC RIGHT-OF-WAY SHALL BE REINFORCED CONCRETE PIPE AS PER SECTION 550 OF THE IDOT STANDARD SPECIFICATION FOR ROAD AND BRIDGE CONSTRUCTION.
 2. STORM SEWER ON PRIVATE PROPERTY MAY BE PVC SDR-26, DUCTILE IRON, OR RCCP.
 3. ALL OTHER PIPE MATERIAL MUST BE APPROVED BY THE VILLAGE ENGINEER.
 4. JOINTS FOR RCCP SHALL BE PREFORMED, FLEXIBLE, O-RING GASKET TYPE OR TYLOX SUPER SEAL GASKET (ASTM C-361).
 5. MINIMUM STORM SEWER PIPE DIAMETER IS 12" UNLESS OTHERWISE APPROVED BY THE VILLAGE ENGINEER

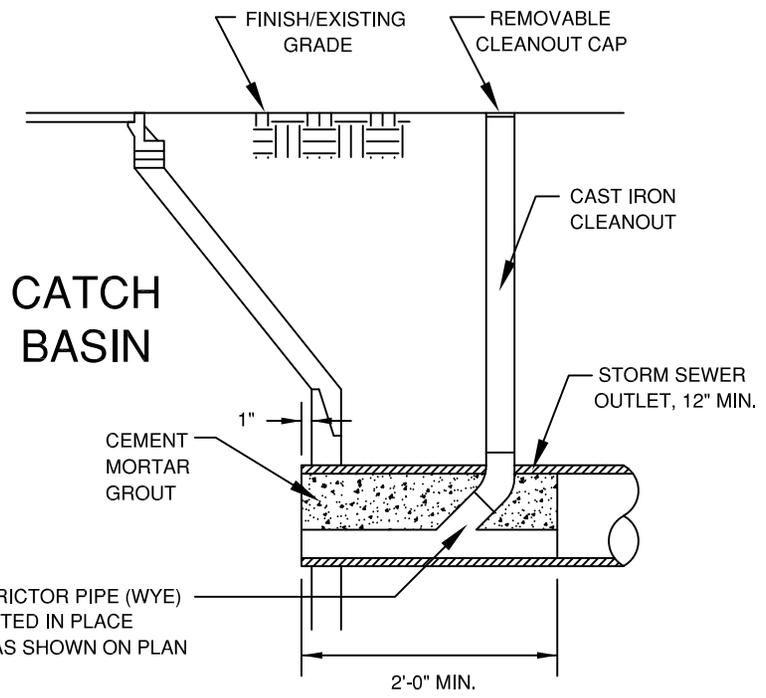

VILLAGE OF WHEELING
ENGINEERING DIVISION
2 COMMUNITY BOULEVARD
WHEELING, IL 60090
WWW.WHEELINGIL.GOV

CATCH BASIN & RESTRICTOR CLEANOUT STANDARD

VILLAGE OF WHEELING SPECIFICATIONS AND DETAILS	REVISIONS		DETAIL NO.
	FILE LOCATION	S.W.	
T:\ENGINEERING\STANDARDS	S.W.	2-27-03 PER COMMENTS	
	K.R.G.	9-11-06 AUTOCAD FILE	
	K.A.G.	12-11-18 SUMP DEPTH	